

S1

Live Performance Condenser Microphone

AUSTRALIA
107 Carnarvon st, Silverwater NSW 2128 Australia
Ph: +61 2 9648 5855 Fx: +61 2 9648 2455

USA
PO Box 91028, Long Beach CA 90809-1028
Ph: +1 562 364 7400 Fax: +1 888 412 4664



Features


- Studio quality live condenser microphone
- Feedback rejecting super-cardioid pick up pattern
- Rugged all metal construction
- Heat treated high-strength head
- Available in satin-nickel (S1) or black (S1-B)
- Low handling noise
- Designed and manufactured in Australia
- Free 10 year extended warranty when you register online at www.rodemic.com/warranty

Specifications


Acoustic Principle	Pressure gradient
Maximum SPL	151dB SPL (@ 1kHz, 1% THD into 1K Ω load)
Active Electronics	JFET impedance converter with bipolar output buffer
Maximum Output	12.5dBu (@ 1kHz, 1% THD into 1K Ω load)
Capsule	0.75"
Sensitivity	-46.0dB re 1 Volt/Pascal (5.00mV @ 94 dB SPL) +/- 2 dB @ 1kHz
Polar Pattern	Super Cardioid
Power Options	P48 phantom power
Frequency Range	20Hz - 20kHz
Weight	308.00gm
Output Impedance	50 Ω
Dimensions	183.00mmH x 52.00mmW x 52.00mmD
Signal/Noise Ratio	75 dB SPL (A - weighted per IEC651)
Output	XLR
Equivalent Noise	18 dB SPL (A - weighted per IEC651)

Incl. Accessories


- RM1 stand mount
- ZP1 zip pouch

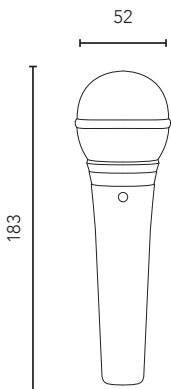

Polar Pattern



Frequency Response

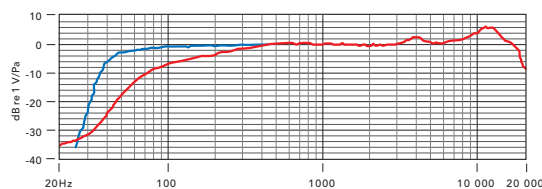

RØDE
MICROPHONES