

EOS 4000D

SIMPLE DSLR STORYTELLING TO SET YOU APART

Tell distinctive stories.
Create outstanding photos
and movies full of detail
and colour with this easy to
use 18 Megapixel DSLR.
Instantly share and shoot
remotely with Wi-Fi* and
the Canon Camera
Connect app.



- Take beautiful photos and movies with background blur
- Easily connect and share your images on the go
- Express your creativity with easy to follow guidance
- Learn as you shoot and discover interchangeable lenses
- Confidently capture great results in tricky situations

18.0 MEGA
PIXELS
CMOS

A+
Scene
Intelligent Auto

9-point
AF

Creative Filters

EOS Movie
FULL HD

6.8 cm
2.7" LCD

Feature Guide

Wi-Fi

PRODUCT RANGE



EOS 800D



EOS 200D



EOS 2000D



EOS 1300D



EOS 4000D

EOS 200D
EOS 2000D
EOS 1300D
EOS 4000D

Canon

Live for the story_

* Wi-Fi connectivity and features vary by model and region. Not all functions or devices are supported; see full specifications for details.

TECHNICAL SPECIFICATIONS

EOS 4000D

IMAGE SENSOR

Type	Approx. 22.3 mm x 14.9 mm
Effective Pixels	Approx. 18.0 megapixels
Total Pixels	Approx. 18.7 megapixels
Aspect Ratio	3:2
Low-Pass Filter	Built-in/Fixed
Sensor Cleaning	Manual cleaning and Dust Delete Data acquisition
Colour Filter Type	RGB Primary Colour

IMAGE PROCESSOR

Type	DIGIC 4+
-------------	----------

LENS

Lens Mount	EF/EF-S
Focal Length	Equivalent to 1.6x the focal length of the lens
Image Stabilisation	Optical Image Stabilizer provided on compatible lenses

FOCUSING

Type	Via optical viewfinder: TTL secondary image-forming phase-difference detection system with AF-dedicated sensor
-------------	---

AF System/ Points

Via live view on LCD screen:
Contrast detection AF

Via optical viewfinder:
9 AF points (f/5.6 cross type at centre)

AF working range

Via optical viewfinder:
Centre AF point: EV 0 -18
(at room temperature & ISO100)
Other AF points: EV 1 -18
(at room temperature & ISO100)

AF Modes

Via live view LCD screen:
EV 1 -18 (at room temperature & ISO100)

Via optical viewfinder:
AI Focus (Switches between One-Shot AF and AI SERVO AF automatically)
One Shot AF
AI Servo
Manual

AF Point Selection

Via live view LCD screen:
One Shot AF (Contrast detect AF)
Quick Mode (via phase detection AF sensor)
Manual

Via optical viewfinder:
Automatic selection from up to 9 points
Manual selection

Selected AF point display

Via live view on LCD screen:
FlexiZone - Freely position 1 AF point via manual selection
Live Mode - Automatic selection with face detection

Predictive AF

Indicated by superimposed display in the viewfinder and on the LCD monitor

AF Lock

Yes

Locked when shutter button is pressed half way in One Shot AF mode. Customisation available via AE Lock Button

AF Assist Beam

Intermittent firing of built-in flash or emitted by optional dedicated Speedlite (effective up to 4.0 m)

Manual Focus

Selected on lens

EXPOSURE CONTROL

Metering modes

Via optical viewfinder:
Evaluative via 63 zone dual-layer metering sensor (linked to all AF points)
Partial (centre, approx. 10% of viewfinder)
Centre-weighted average available

Metering Range

Via live view on LCD screen:
Evaluative metering (315 zones)

Via optical viewfinder:
EV 1-20 (at room temperature, ISO 100, evaluative metering)

AE Lock

Via live view on LCD screen:
EV 0-20 (at room temperature, ISO 100, evaluative metering)

Auto: In 1-shot AF mode with evaluative metering exposure is locked when focus is achieved.

Exposure Compensation

Manual: By AE lock button in creative zone modes.
+/-5 EV in 1/3 or 1/2 stop increments (can be combined with AEB)

AEB

ISO Sensitivity

3 shots +/- 2 EV, 1/2 or 1/3-stop increments
AUTO(100-6400), 100-6400 in 1-stop increments
ISO can be expanded to H: 12800^[4]

During Movie shooting: Auto (100-6400), 100-6400 (Whole stop increments)

SHUTTER

Type

Electronically-controlled focal-plane shutter, with electronic first curtain

Speed

30-1/4000 sec (1/2 or 1/3 stop increments), Bulb (Total shutter speed range. Available range varies by shooting mode)

WHITE BALANCE

Type

Auto white balance with the imaging sensor
AWB (Ambience priority, White priority), Daylight, Shade, Cloudy, Tungsten, White Fluorescent light, Flash, Custom (Approx. 2000K - 10000 K)

Settings

White balance compensation:
Blue/Amber +/-9
Magenta/ Green +/-9

Custom White Balance

WB Bracketing

Yes, 1 setting can be registered
+/-3 levels in single level increments
3 bracketed images per shutter release.
Selectable Blue/Amber bias or Magenta/Green bias.

VIEWFINDER

Type

Pentamirror

Coverage (Vertical/Horizontal)

Approx. 95%

Magnification

Approx. 0.80x^[4]

Eyepoint

Approx. 21mm (from eyepiece lens center)

Dioptr Correction

Fixed at -1.0 m-1 (dpt)
- E-series Dioptic Adjustment Lenses can be used to make dioptric adjustments

Focusing Screen

Fixed

Mirror

Quick-return half mirror

Depth of field preview

Yes, assigned to SET button

Eyepiece shutter

On strap

Live for the story_

TECHNICAL SPECIFICATIONS

EOS 4000D

LCD MONITOR

Type	6.8 cm (2.7") TFT LCD, approx. 230 K dots
Coverage	Approx. 100%
Viewing Angle (horizontally/vertically)	Approx. 120° vertically Approx. 130° horizontally
Brightness Adjustment	Adjustable to one of seven levels
Display Options	Quick Control Screen Camera settings

FLASH

Built-in Flash GN (ISO 100, meters)	9.2
Built-in Flash Coverage	up to 17mm focal length (35mm equivalent: 28mm)
Built-in Flash recycle time	Approx. 2 seconds
Modes	Auto, Manual Flash On/off
X-sync	X-contact not equipped, Max. flash sync speed: 1/200 sec. with compatible Speedlites
Flash Exposure Compensation	+/- 2EV in 1/2 or 1/3 increments
Flash Exposure Lock	Yes
Second Curtain Synchronisation	Yes
HotShoe/ PC terminal	Yes/No
External Flash Compatibility	E-TTL II with EX series Speedlites ^[32]
External Flash Control	Available via camera menu screen, except for wireless radio flash shooting settings

SHOOTING

Modes	Scene Intelligent Auto, Creative Auto, Portrait, Landscape, Close-up, Sports, Food, Night Portrait, Program AE, Shutter priority AE, Aperture priority AE, Manual, Movie Mode
Picture Styles	Auto, Standard, Portrait, Landscape, Neutral, Faithful, Monochrome, User Defined (x3)
Colour Space	sRGB and Adobe RGB
Image Processing	Highlight Tone Priority Auto Lighting Optimizer (4 settings) Long exposure noise reduction High ISO speed noise reduction (4 settings) Auto Correction of Lens Peripheral Illumination (up to 20 lens profiles can be registered in camera)
Drive modes	Single, Continuous, Self timer (2s, 10s, 10s + continuous shots 2-10)
Continuous Shooting	Max. Approx. 3 fps in JPEG until memory card becomes full ^[1] , 6 images RAW ^[2] ^[10]

LIVE VIEW MODE

Coverage	Approx. 100% (horizontally and vertically)
Frame Rate	29.97 fps
Focusing	Live Mode: One Shot AF (Contrast detect AF) Quick Mode: One Shot AF (phase detection AF sensor) Manual (Magnification 5x or 10x available)
Metering	Real-time evaluative metering with image sensor Active metering time can be changed
Display Options	Grid overlay (x2), Histogram

FILE TYPE

Still Image Type	JPEG: Fine, Normal (Exif 2.30 compliant) / Design rule for Camera File system (2.0), RAW: RAW (14bit, Canon original RAW 2nd edition), Digital Print Order Format [DPOF] Version 1.1 compliant
------------------	---

RAW+JPEG simultaneous recording

Image Size	Yes, RAW + Large JPEG
	JPEG 3:2: (L) 5184 x 3456, (M) 3456 x 2304, (S1) 2592 x 1728, (S2) 1920 x 1280, (S3) 720 x 480 JPEG 4:3: (L) 4608 x 3456, (M) 3072 x 2304, (S1) 2304 x 1728, (S2) 1696 x 1280, (S3) 640 x 480 JPEG 16:9: (L) 5184 x 2912, (M) 3456 x 1944, (S1) 2592 x 1456 (S2) 1920 x 1080, (S3) 720 x 400 JPEG 1:1: (L) 3456 x 3456, (M) 2304 x 2304, (S1) 1728 x 1728, (S2) 1280 x 1280, (S3) 480 x 480

RAW: (RAW) 5184 x 3456

Movie Type

Movie Size	MOV (Video: H.264 inter frame (IPB), Sound: Linear PCM, recording level can be manually adjusted by user) 1920 x 1080 (30, 25, 24 fps) 1280 x 720 (60, 50 fps) 640 x 480 (30, 25 fps)
Movie Length	Max duration 29 min 59 sec, Max file size 4 GB
Folders	New folders can be manually created and selected
File Numbering	Consecutive numbering Auto reset Manual reset

OTHER FEATURES

Custom Functions	10 Custom Functions
Metadata Tag	User copyright information (can be set in camera) Image rating (0-5 stars)
Intelligent Orientation Sensor	Yes
Playback zoom	1.5x - 10x enabled in 15 steps
Display Formats	(1) Single image with information (2 levels) (2) Single image (3) Index display (4/9 images) (4) Jump Display (1/10/100 images, by Date, by Folder, Movies only, Stills only, by Rating)
Slide Show	Image selection: All images, by Date, by Folder, Movies, Stills, Rating Playback time: 1/2/3/5/10 or 20 seconds Repeat: On/Off Transition Effect: Off, Slide 1, Slide 2, Fade 1, Fade 2, Fade 3 Background Music: On, Off
Histogram	Brightness: Yes RGB: Yes
Highlight Alert	Yes
Image Erase/Protection	Erase: Single image, selected images, all images in folder or all images on card Protection: Erase protection for single image, all images in a folder or all images in the card

Menu Categories

Menu Languages	(1) Shooting menu (x4) (2) Playback menu (x2) (3) Setup menu (x3) (4) My Menu
	25 Languages English, German, French, Dutch, Danish, Portuguese, Finnish, Italian, Norwegian, Swedish, Spanish, Greek, Russian, Polish, Czech, Hungarian, Romanian, Ukrainian, Turkish, Arabic, Thai, Simplified Chinese, Traditional Chinese, Korean and Japanese
Firmware Update	Update possible by the user

INTERFACE

Computer	Hi-Speed USB only
Wi-Fi	Wi-Fi (IEEE802.11b/g/n), (2.4 GHz only) ^[17]
Wi-Fi Security	Connectivity to Smart devices is possible via Canon Camera Connect app ^[34] Camera Access Point: WPA2-PSK with AES encryption or open
Other	Infrastructure: Shared key, with WEP encryption, WPA-PSK/WPA2-PSK with TKIP/AES encryption or open HDMI mini (Type-C) output

DIRECT PRINT

Canon Printers	Canon Compact Photo Printers and PIXMA Printers supporting PictBridge
PictBridge	Yes

STORAGE Type

SD card, SDHC card or SDXC card

SUPPORTED OPERATING SYSTEM

PC & Macintosh	Windows 10 / 8.1 / 7 SP1 ^[24] Mac OS X 10.10 - 10.13
----------------	--

Live for the story_

TECHNICAL SPECIFICATIONS

EOS 4000D

SOFTWARE

Image Processing Other

Digital Photo Professional (RAW Image Processing)
EOS Utility
EOS Lens Registration Tool
EOS Web Service Registration Tool
EOS Sample Music
Picture Style Editor

Camera Connect app available on iOS and Android devices ^[34]

POWER SOURCE

Batteries

Battery life

1 x Rechargeable Li-ion Battery LP-E10
Approx. 500 (at 23°C, AE 50%, FE 50%) ^[5]
Approx. 410 (at 0°C, AE 50%, FE 50%)

Battery Indicator

4 levels

Power saving

Power turns off after 30sec or 1, 2, 4, 8 or 15mins.

Power Supply & Battery Chargers

Battery charger LC-E10E

PHYSICAL SPECIFICATIONS

Body Materials

Polycarbonate resin with glass fibre

Operating Environment

0 – 40 °C, 85% or less humidity

Dimensions (WxHxD)

129.0 x 101.6 x 77.1 mm

Weight (body only)

Approx. 436 g (CIPA testing standard, including battery and memory card)

ACCESSORIES

Viewfinder

Eyecup Ef
Rubber Frame Ef
E-series Dioptic Adjustment Lenses
Eyepiece Extender EP-EX15II
Angle Finder C
Magnifier MG-Ef

Case

Semi Hard Case EH26-L, EH27-L
Protecting Cloth PC-E1, PC-E2
Shoulder Bag SB10, SB100
Backpack BP10, BP12, BP100
Messenger Bag MS10, MS11
Sling Bag SL100
Holster HL100

Lenses

All EF and EF-S lenses

Flash

Canon Speedlites (90EX, 220EX, 270EX, 270EX II, 320EX, 420EX, 430EX, 430EX II, 430EX III-RT, 550EX, 580EX, 580EX II, 600EX, 600EX-RT, Macro-Ring-Lite MR-14EX II, Macro Twin Lite MT-24EX, Speedlite Transmitter ST-E2, Speedlite Transmitter ST-E3-RT) ^[32]

Other

Hand Strap E2, HDMI Cable HTC-100, Interface Cable IFC400PCU

Footnotes

^[1] Large/Fine(Quality 8) resolution

^[2] Based on Canon's testing conditions, JPEG, ISO 100, Standard Picture Style. Varies depending on the subject, memory card brand and capacity, image recording quality, ISO speed, drive mode, Picture Style, Custom functions etc.

^[4] With 50mm lens at infinity, -1m⁻¹ dpt

^[5] Based on the CIPA Standard and using the batteries and memory card format supplied with the camera, except where indicated

^[8] Recommended Exposure Index

^[10] Sustained continuous shooting speed is tested based on Canon's testing standard. Function requires compatible SDHC/SDXC UHS Speed Class 1 memory card, total number of frames captured varies depending on shooting subject, settings and brand of memory card

^[17] Wi-Fi use may be restricted in certain countries or regions

^[24] Software applications compatible with Windows 10 in Windows 10 Desktop Mode only

^[32] Speedlites other than the EX-series or non-Canon flash units cannot be used. Not all functions of the Canon EX-series flashes are supported

^[34] Canon Camera Connect app is available for Apple iOS and Android devices only. Please refer to Google PlayStore® and Apple AppStore® for compatible versions of Android OS and Apple iOS

All data is based on Canon standard testing methods (according to CIPA Standards) except where indicated.

Subject to change without notice.

Live for the story_

Canon Inc.
canon.com
Canon Europe
canon-europe.com
English edition
Canon Europa NV 2018

**EASILY AND INTUITIVELY SHOOT AND SHARE
DISTINCTIVE STORIES WITH COLOUR, DETAIL AND
DEPTH THAT SET YOU APART**

EOS 4000D

Tell distinctive stories. Create outstanding photos and movies full of detail and colour with this easy to use 18 Megapixel DSLR. Instantly share and shoot remotely with Wi-Fi * and the Canon Camera Connect app.

Sales Start Date: April 2018 (TBC)



PRODUCT DETAILS:

Product Name	Mercury Code	EAN Code
D.CAMERA EOS 4000D BK BODY EU26	3011C001AA	4549292116564
D.CAMERA EOS 4000D BK 18-55 IS EU26	3011C002AA	4549292116557
D.CAMERA EOS 4000D BK 18-55 III EU26	3011C003AA	4549292116571
D.CAMERA EOS 4000D BK 18-55 III + 75-300 EU26	3011C010AA	8714574657325
D.CAMERA EOS 4000D BK 18-55 III + SB130 +16GB EU26	3011C013AA	8714574657356

Canon

Live for the story_

* Wi-Fi connectivity and features vary by model and region. Not all functions or devices are supported; see full specifications for details.

**EASILY AND INTUITIVELY SHOOT AND SHARE
DISTINCTIVE STORIES WITH COLOUR, DETAIL AND
DEPTH THAT SET YOU APART**

EOS 4000D

Tell distinctive stories. Create outstanding photos and movies full of detail and colour with this easy to use 18 Megapixel DSLR. Instantly share and shoot remotely with Wi-Fi * and the Canon Camera Connect app.



MEASUREMENT / LOGISTIC INFORMATION:

Product Name	Mercury Code	Pack type	Pack description	Quantity per pack	Length (cm)	Width (cm)	Height (cm)	Gross Weight (kg)
EOS 4000D BODY	3011C001AA	EA	Each	1	16.55	22.15	13.8	1.1382
		CT	Carton	6	43.3	35.1	26.1	7.84
		EP	Euro Pallet	120	120	80	119.4	167
			Layers per Pallet	4				
			Cartons per Layer	5				
			Products per layer	30				
EOS 4000D 18-55 IS	3011C002AA	EA	Each	1	16.55	22.15	13.8	1.3827
		CT	Carton	6	43.3	35.1	26.1	9.31
		EP	Euro Pallet	120	120	80	119.4	196
			Layers per Pallet	4				
			Cartons per Layer	5				
			Products per layer	30				
EOS 4000D 18-55 III	3011C003AA	EA	Each	1	16.55	22.15	13.8	1.3777
		CT	Carton	6	43.3	35.1	26.1	9.28
		EP	Euro Pallet	120	120	80	119.4	196
			Layers per Pallet	4				
			Cartons per Layer	5				
			Products per layer	30				

Canon

Live for the story_

* Wi-Fi connectivity and features vary by model and region. Not all functions or devices are supported; see full specifications for details.

**EASILY AND INTUITIVELY SHOOT AND SHARE
DISTINCTIVE STORIES WITH COLOUR, DETAIL AND
DEPTH THAT SET YOU APART**

EOS 4000D

Tell distinctive stories. Create outstanding photos and movies full of detail and colour with this easy to use 18 Megapixel DSLR. Instantly share and shoot remotely with Wi-Fi* and the Canon Camera Connect app.



MEASUREMENT / LOGISTIC INFORMATION:

Product Name	Mercury Code	Pack type	Pack description	Quantity per pack	Length (cm)	Width (cm)	Height (cm)	Gross Weight (kg)
EOS 4000D BK 18-55 III + 75-300 EU26	3011C010AA	EA	Each	1	23.6	17.2	26.4	2.4
		CT	Carton	4	58.8	38.8	27.7	10.47
		EP	Euro Pallet	48	120	80	98.1	136
			Layers per Pallet	3				
			Cartons per Layer	4				
			Products per layer	16				
EOS 4000D BK 18-55 III +SB130+ 16GB + LC EU26	3011C013AA	EA	Each	1	31	26.5	19	2.03
		CT	Carton	4	60	40	40	9.27
		EP	Euro Pallet	32	120	80	95	84.2
			Layers per Pallet	2				
			Cartons per Layer	4				
			Products per layer	16				

What's in the box?

EOS 4000D BK BODY

- EOS 4000D body
- Eyecup Ef
- Camera Cover R-F-3
- Camera strap EW-400D
- Battery Pack LP-E10
- Battery Charger LC-E10E
- Power cable for battery charger
- Getting started guide

EOS 4000D BK + EF-S18-55mm III

- EOS 4000D body
- EF-S 18-55mm f/3.5-5.6 III
- Eyecup Ef
- Camera Cover R-F-3
- Camera strap EW-400D
- Battery Pack LP-E10
- Battery Charger LC-E10E
- Power cable for battery charger
- Lens Cap E-58 II
- Lens Dust Cap E
- Getting started guide

EOS 4000D BK + EF-S18-55mm IS II

- EOS 4000D body
- EF-S 18-55mm f/3.5-5.6 IS II
- Eyecup Ef
- Camera Cover R-F-3
- Camera strap EW-400D
- Battery Pack LP-E10
- Battery Charger LC-E10E
- Power cable for battery charger
- Lens Cap E-58 II
- Lens Dust Cap E
- Getting started guide



Live for the story_

* Wi-Fi connectivity and features vary by model and region. Not all functions or devices are supported; see full specifications for details.

EASILY AND INTUITIVELY SHOOT AND SHARE DISTINCTIVE STORIES WITH COLOUR, DETAIL AND DEPTH THAT SET YOU APART

EOS 4000D

Tell distinctive stories. Create outstanding photos and movies full of detail and colour with this easy to use 18 Megapixel DSLR. Instantly share and shoot remotely with Wi-Fi* and the Canon Camera Connect app.



What's in the box?

EOS 4000D BK 18-55mm + CB-SB130 + 16GB + LC

- EOS 4000D body
- EF-S 18-55mm f/3.5-5.6 III
- Shoulder Bag CB-SB130 BK
- 16GB SD Card
- Lens cleaning cloth
- Eyecup Ef
- Camera Cover R-F-3
- Camera strap EW-400D
- Battery Pack LP-E10
- Battery Charger LC-E10E
- Power cable for battery charger
- Lens Cap E-58 II
- Lens Dust Cap E
- Getting started guide

EOS 4000D BK 18-55mm + 75-300mm

- EOS 4000D body
- EF-S 18-55mm f/3.5-5.6 III
- EF 75-300mm f/4-5.6 III
- Eyecup Ef
- Camera Cover R-F-3
- Camera strap EW-400D
- Battery Pack LP-E10
- Battery Charger LC-E10E
- Power cable for battery charger
- Lens Cap E-58 II x2
- Lens Dust Cap E x2
- Getting started guide

Canon

Live for the story_

* Wi-Fi connectivity and features vary by model and region. Not all functions or devices are supported; see full specifications for details.


EOS 4000D

SIMPLE DSLR STORYTELLING TO SET YOU APART



- Take beautiful photos and movies with background blur
- Easily connect and share your images on the go
- Express your creativity with easy to follow guidance
- Learn as you shoot and discover interchangeable lenses
- Confidently capture great results in tricky situations

Tell distinctive stories. Create outstanding photos and movies full of detail and colour with this easy to use 18 Megapixel DSLR. Instantly share and shoot remotely with Wi-Fi * and the Canon Camera Connect app.

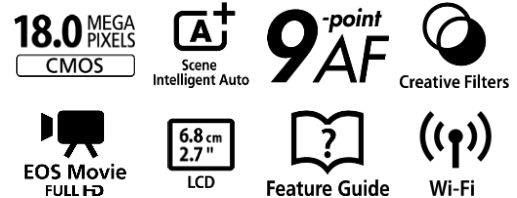

Price To be entered by local NSO

Embargo Date: 26th February 2018

Sales Start Date: April 2018 (TBC)

Key Sales Channel

- Consumer Electronics & E-tail
- Canon E-commerce
- Hyper & Mass Markets

Competition

Nikon D3400 Nikon D3300

Customer and Positioning

Customer 'Max' - Simple to use entry level camera with refined, familiar handling that delivers high quality images effortlessly. Perfect for smartphone users looking to move into interchangeable lens photography for the first time.

Launch Promotion

- To be entered by local NSO

Canon

Live for the story_

* Wi-Fi connectivity and features vary by model and region. Not all functions or devices are supported; see full specifications for details.