


RF 600mm F4L IS USM

PERFORMANCE WITHOUT COMPROMISE

A high-performance super telephoto lens with class-leading portability and performance, the RF 600mm F4L IS USM puts you right in the middle of the action. Ideal for sports and wildlife photography when you need the best image quality available.

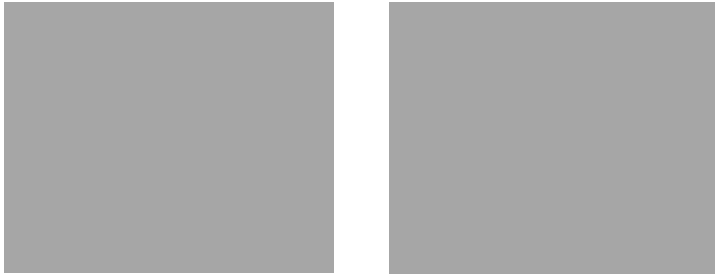

- Next level image quality
- Nail critical focus when it matters most
- Great performance in less-than-great light
- Instinctive handling
- Built to inspire confidence

PRODUCT RANGE



Canon RF 100-500mm
f/4.5-7.1 L IS USM



Canon RF 600mm F4L IS USM



EF 600mm f/4L IS III USM

Canon RF 100-500mm
f/4.5-7.1 L IS USM

**Canon RF 600mm F4L IS
USM**

Canon EF 600mm f/4L IS
III USM

Canon EF 200-400mm
f/4L IS USM Extender
1.4x

Canon RF 600mm f/11
IS STM

Canon

Live for the story_

TECHNICAL SPECIFICATIONS

RF 600mm F4L IS USM

OPTICAL FEATURES/ SPECIFICATIONS

Image size	Full Frame
Angle of view (horzntl, vertl, diagnl)	3°30', 2°20', 4°10'
Lens construction (elements/groups)	17/13
Special optics	2x Fluorite, 1X SUD
No. of diaphragm blades	9
Minimum aperture	32
Closest focusing distance (m)	4.2
Maximum magnification (x)	0.15
Control Ring	No
Image stabilizer OIS	5.5
Image stabilizer	5.5
IBIS x OIS	
AF actuator	Ring USM
Coatings	ASC, Super Spectra
Fluorine	Front / Rear
PHYSICAL SPECIFICATIONS	
Dust/moisture resistance	Yes
Exterior coating	Heat Shield
Filter diameter (mm)	52 Drop in
Max. diameter x length (mm)	168 x 472
Weight (g)	3090

ACCESSORIES

Lens Cap	E-185C
Lens hood	ET-160 (WIII)
Lens case/pouch	Lens Soft Case LS600
Rear cap	Lens Dust Cap RF
Extender Compatibility	Compatible with RF 1.4x & RF 2x Extenders only
Other Accessories	Canon drop-in 52mm filters Canon Drop-In Circular Polarizing Filter 52 (WIII) Canon Lens Short Hood ET-160B

SPECIFICATIONS

1.4X EXTENDER	
Focal Length	840
Maximum Aperture	5.6-45
Maximum Magnification	0.21
AF Possible	Yes
IS	Yes

SPECIFICATIONS WITH 2X EXTENDER

Focal Length	1200
Maximum Aperture	8-64
Maximum Magnification	0.31
AF Possible	yes
IS	yes



Live for the story_

Canon Inc.
canon.com
Canon Europe
canon-europe.com
English edition
Canon Europa NV 2021

PERFORMANCE WITHOUT COMPROMISE

RF 600mm F4L IS USM

A high-performance super telephoto lens with class-leading portability and performance, the RF 600mm F4L IS USM puts you right in the middle of the action. Ideal for sports and wildlife photography when you need the best image quality available.

Sales Start Date: June 2021 TBC



PRODUCT DETAILS:

Product Name	Mercury Code	EAN Code
RF 600mm F4L IS USM	5054C005AA	4549292184457

COMPATIBLE ACCESSORIES:

Product Name	Mercury Code	EAN Code
Lens Hood ET-160 WIII (bundled)	3331C001AA	4549292136746
Lens Short Hood ET-160B (sold separately)	3334C001AA	4549292136777
Lens cap E-185C (bundled)	3332C001AA	4549292136753
Lens Dust Cap RF	2962C001AA	4549292115604
Lens Soft Case LS600 (bundled)	3330C001AA	4549292136739
Drop-In Screw Filter Holder 52 (WIII) With 52mm Protectfilter (bundled)	2612A001AA	4960999431000
Lens Drop-In Gelatin Filter Holder 52 WIII	3051C001AA	4549292118605
Lens Drop-In Circular Polarizing Filter 52 WIII	3050C001AA	4549292118599
Lens Extender RF1.4x	4113C005AA	4549292168044
Lens Extender RF2x	4114C005AA	4549292168051
Lens Wide Strap B	4771B001AA	4960999677859

Live for the story_

PERFORMANCE WITHOUT COMPROMISE

RF 600mm F4L IS USM

A high-performance super telephoto lens with class-leading portability and performance, the RF 600mm F4L IS USM puts you right in the middle of the action. Ideal for sports and wildlife photography when you need the best image quality available.



MEASUREMENT / LOGISTIC INFORMATION:

Product Name	Mercury Code	Pack type	Pack description	Quantity per pack	Length (cm)	Width (cm)	Height (cm)	Gross Weight (kg)
RF 600mm F4L IS USM	5054C005AA	EA	Each	1	56.1	28.6	26.7	5.855
		CT	Carton	1	67.3	40.2	39.7	7.31
		EP	Euro Pallet	TBC	120	80	TBC	TBC
			Layers per Pallet	TBC				
			Cartons per Layer	TBC				
			Products per Layer	TBC				

What's in the box?

- RF 600mm F4L IS USM
- Lens Dust Cap RF
- Drop-In Screw Filter Holder 52 (WIII)
With 52mm Protect filter
- Lens Cap E-185C
- Lens Hood ET-160 (WIII)
- Lens Soft Case LS600
- Lens Wide Strap B
- User Manual

Live for the story_